

The B&D Roll-A-Shutter™ Clear-A-View Industrial Type Poly Carbonate Shutters are specifically designed with retailers in mind, allowing for continual showcasing and product advertisement when the door is closed.

The B&D Roll-A-Shutter Clear-A-View, provides a high level of security whilst maintaining the feel of openness between internal and external spaces, making it ideal for shopfronts, arcades, sporting complexes, clubs, bars and counter tops.

The B&D Roll-A-Shutter Clear-A-View can be supplied in a vast range of sizes and colour finishes.

## RECOMMENDED APPLICATION

- Ideal for shopping centre shopfronts, arcades, sporting complexes, clubs and bars
- Suitable for openings ranging from 1000mm to 4000mm (h) and up to 6400mm (w)
- High level of security.

## **BOTTOM RAILS**

The B&D Roll-A-Shutter Clear-A-View is supplied with a sturdy T-Rail aluminium bottom rail which provides additional strength to the door. This bottom rail may be supplied with an optional weather seal to prevent the unwanted entry of foreign particles.

#### **ROLLER DRUM**

229mm Spiral drum rotating on a 34mm heavy duty shaft fitted with high speed industrial bearing & helical springs to counterbalance the door in accordance with manufacturers specifications.



# THERE'S SO MUCH MORE BEHIND A DOOR

#### **CURTAIN**

100mm Polycarbonate interlocking with 30mm rigid aluminium sections. Each aluminium section is fitted with moulded end caps to reduce friction.

## **SIZES**

For openings up to 4000mm (h) and 64000mm (w).

## **OPERATION**

The B&D Roll-A-Shutter Clear-A-View can be either manually operated or motorised depending upon size requirements. There are a range of electric motors available depending on application and usage.

## **VERSATILE TRACKING SYSTEM**

The 50mm x 30mm aluminium door tracks can be mounted between wall fix or wall behind fix. The guides can also accommodate a rubber twin fin extrusion or mohair felt buffer to ensure a quieter operation. Manual doors are fitted with door stops.

#### LOCKING

The B&D Roll-A-Shutter Clear-A-View may be fitted with a centrally mounted locking mechanism within the mid rail at approximately 900mm above floor level or alternately within the bottom rail. The locking mechanisms are generally concealed behind extruded covers for aesthetics and tamper proofing. Locking is not recommended for motorised doors.


#### **SLOTTING**


Provide 95mm x 25mm vent slots at 70mm spacing where required in the roller shutter.


## **DIMENSIONS** (all measurements in mm)

DOOR HEIGHT	ROLL DIAMETER	CENTRE OF AXLE FROM WALL
900	290	155
1200	290	155
1500	290	155
1800	300	160
2100	300	160
2400	310	165
2700	310	165
3000	320	170
3300	320	170
3600	340	180
4000	340	180

#### **CLEARANCES**





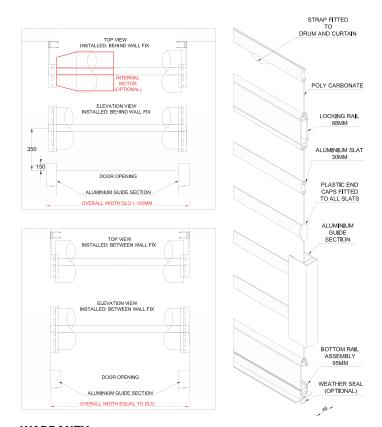

## **WARRANTY**

A 12 month limited material, labour and workmanship warranty applies.

B&D Doors has offices servicing all states. For more details on this product or our other ranges phone **13 62 63** or visit **www.bnd.com.au** 



Notes / Information

- a) B&D Roll-A-Shutter™ Clear-A-View Industrial Type Poly Carbonate Shutters are covered by a 12 month warranty, for complete door and parts, as recommended in the door's handbook. Full details of the warranty are available from www.bnd.com.au. 12 month warranty only applies to doors purchased and installed in Australia & New Zealand. Warranty only valid if warranty conditions are met.
- b) For areas within one kilometre of a corrosive environment eg. salt air or industrial fallout, special care and maintenance are generally required Consult B&D or your B&D Accredited Dealer for advice.
- c) The company reserves the right to make changes or improvements to the products or accessories without notice and without incurring any obligation to make similar changes or improvements to goods previously ordered. Specifications subject to change without notice.

Call 13 62 63 or visit www.bnd.com.au for further information.